

Endurance® Wall Bunk
42in Rail

CORTECH

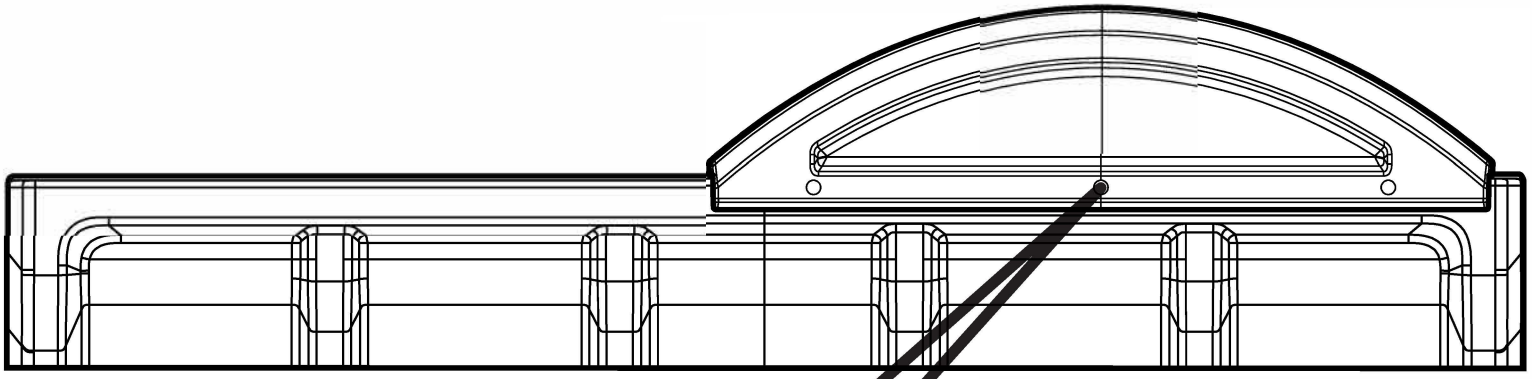

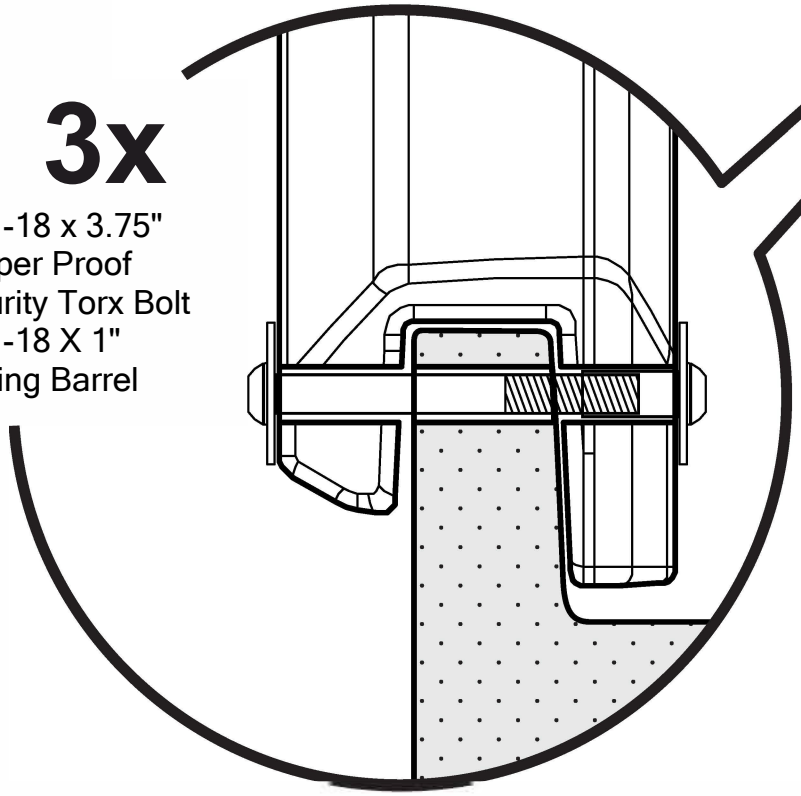

3x

5/16 -18 x 3.75"
Tamper Proof
Security Torx Bolt
5/16 -18 X 1"
Binding Barrel

1. Align bunk railing to desired location of the bunk and use the bolt holes to mark drill locations on the bunk surface.
2. Drill through the bunk wall at each point and blow holes clear.
3. Realign the railing and insert a bolt into each hole. Make sure to go through both the railing and bunk surfaces.
4. Insert a binding barrel into the other end of each hole and use fingers to secure the binding to the end of the bolt.
5. Tighten the binding by turning the head 3 to 5 turns past finger tight.